

**6U OpenVPX  
BACKPLANE  
BKP6-CEN06-11.2.8-4**


**VITA 46  
VITA 65**



**Key Features:**

- Compliant to VITA 46.0 baseline specification
- Compliant to VITA 65 6-CEN06-11.2.8-4
- 6 Slots VPX, 5 Payload Slots , 1 Switch Slot
- Configuration Data plane: Quad Star (4xFP/Slot)
- Configuration Control plane: 1xTP Available to RTMs
- M3 studs for power entry
- PCB size 261.85mm x 151,96mm x 5.4 mm
- 5 HP from slot to slot (25.40 mm)
- Flexible keying and alignment mechanism
- with geographical address pins
- System Management Interface on the backplane (I2CA, I2CB)
- with JTAG connector on first slot (JT1)
- Reference clock
- Auxiliary clock
- Non-Volatile Memory Read Only signal set by Jumper BR1
- Battery backup option setting by Jumper XBAT. Vbat external or connected to 3.3 AUX.
- Max. Input current per backplane  
VS1:VS2:VS3 = 168A : 132A : 132A  
(14A/ Slot and Voltage)
- System Reset
- Operating temperature: -40° - +85°C
- Storage temperature: -55°C - +85°C
- Flammability rating: UL94-V0
- Custom assembly or modification on request

Front side

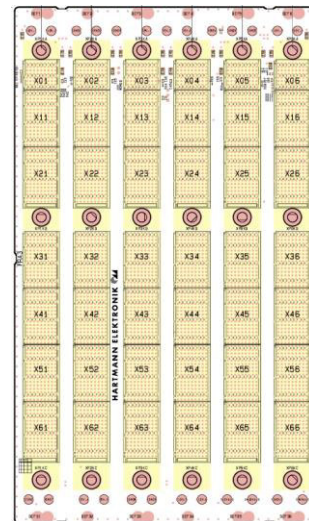

Rear side



▪ **Order number: B196510861**

6U OpenVPX  
BACKPLANE  
BKP6-CEN06-11.2.8-4


VITA 46  
VITA 65



**1) Topology: 06-Slot — BKP6-CEN06-11.2.8-4 (5 Payload + 1 Switch)**

Profile Switch slot: SLT6-SWH-24F-10.4.3

Profile Payload slot: SLT6-PAY-4F2T-10.2.2

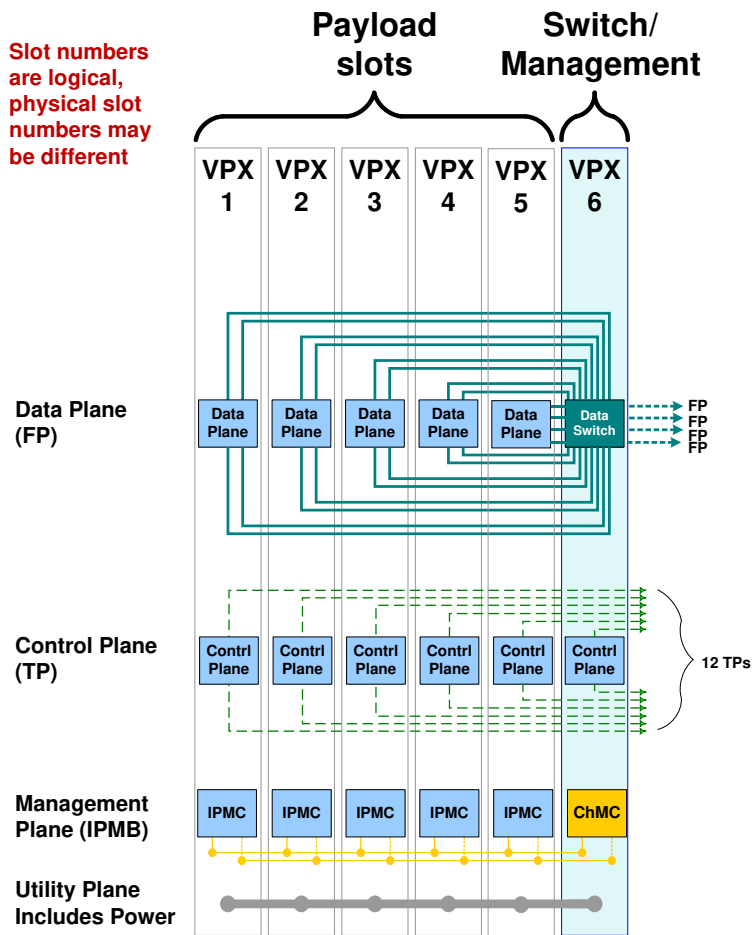

**6U OpenVPX  
BACKPLANE  
BKP6-CEN6-11.2.8-4**

**VITA 46  
VITA 65**



## 2) Pin Assignment

### Pin Assignment VPX P0 (Utility Connector)

	Row G	Row F	Row E	Row D	Row C	Row B	Row A
1	Vs1	Vs1	Vs1	No Pad*	Vs2	Vs2	Vs2
2	Vs1	Vs1	Vs1	No Pad*	Vs2	Vs2	Vs2
3	Vs3	Vs3	Vs3	No Pad*	Vs3	Vs3	Vs3
4	SM2	SM3	GND	-12V_Aux	GND	SYSRESET*	NVMRO
5	GAP*	GA4*	GND	3.3V_Aux	GND	SM0	SM1
6	GA3*	GA2*	GND	+12V_Aux	GND	GA1*	GA0*
7	TCK	GND	TDO	TDI	GND	TMS	TRST*
8	GND	REF_CLK-	REF_CLK+	GND	AUX_CLK-	AUX_CLK+	GND

### Payload Slot Profile SLT6-PAY-4F2T-10.2.2— P1 & J1

Plug-In Module P1	Row G	Row F	Row E		Row D	Row C	Row B		Row A	
			Even	Odd			Even	Odd		
Bplane J1	Row i	Row h	Row g	Row f	Row e	Row d	Row c	Row b	Row a	
1	Data Plane Port 1	GDiscrete1	GND	GND-J1	DP01-T0-	DP01-T0+	GND	GND-J1	DP01-R0-	DP01-R0+
2		GND	DP01-T1-	DP01-T1+	GND-J1	GND	DP01-R1-	DP01-R1+	GND-J1	GND
3		P1-VBAT	GND	GND-J1	DP01-T2-	DP01-T2+	GND	GND-J1	DP01-R2-	DP01-R2+
4		GND	DP01-T3-	DP01-T3+	GND-J1	GND	DP01-R3-	DP01-R3+	GND-J1	GND
5	Data Plane Port 2	SYS_CON*	GND	GND-J1	DP02-T0-	DP02-T0+	GND	GND-J1	DP02-R0-	DP02-R0+
6		GND	DP02-T1-	DP02-T1+	GND-J1	GND	DP02-R1-	DP02-R1+	GND-J1	GND
7		Reserved	GND	GND-J1	DP02-T2-	DP02-T2+	GND	GND-J1	DP02-R2-	DP02-R2+
8		GND	DP02-T3-	DP02-T3+	GND-J1	GND	DP02-R3-	DP02-R3+	GND-J1	GND
9	Data Plane Port 3	UD	GND	GND-J1	DP03-T0-	DP03-T0+	GND	GND-J1	DP03-R0-	DP03-R0+
10		GND	DP03-T1-	DP03-T1+	GND-J1	GND	DP03-R1-	DP03-R1+	GND-J1	GND
11		UD	GND	GND-J1	DP03-T2-	DP03-T2+	GND	GND-J1	DP03-R2-	DP03-R2+
12		GND	DP03-T3-	DP03-T3+	GND-J1	GND	DP03-R3-	DP03-R3+	GND-J1	GND
13	Data Plane Port 4	UD	GND	GND-J1	DP04-T0-	DP04-T0+	GND	GND-J1	DP04-R0-	DP04-R0+
14		GND	DP04-T1-	DP04-T1+	GND-J1	GND	DP04-R1-	DP04-R1+	GND-J1	GND
15		Maskable Reset*	GND	GND-J1	DP04-T2-	DP04-T2+	GND	GND-J1	DP04-R2-	DP04-R2+
16		GND	DP04-T3-	DP04-T3+	GND-J1	GND	DP04-R3-	DP04-R3+	GND-J1	GND

**6U OpenVPX  
BACKPLANE  
BKP6-CEN06-11.2.8-4**

**VITA 46  
VITA 65**



**Payload Slot Profile SLT6-PAY-4F2T-10.2.2— P2 & J2**


Plug-In Module P2	Row G	Row F	Row E		Row D	Row C	Row B		Row A
			Even	Odd			Even	Odd	
Backplane J2	Row i	Row h	Row g	Row f	Row e	Row d	Row c	Row b	Row a
This connector is all User Defined pins.									

**Payload Slot Profile SLT6-PAY-4F2T-10.2.2— P3 & J3**

Plug-In Module P3	Row G	Row F	Row E		Row D	Row C	Row B		Row A
			Even	Odd			Even	Odd	
Backplane J3	Row i	Row h	Row g	Row f	Row e	Row d	Row c	Row b	Row a
This connector is all User Defined pins.									

**Payload Slot Profile SLT6-PAY-4F2T-10.2.2— P4 & J4**

Plug-In Mod P4	Row G	Row F	Row E		Row D	Row C	Row B		Row A
			Even	Odd			Even	Odd	
Bplane J4	Row i	Row h	Row g	Row f	Row e	Row d	Row c	Row b	Row a
1	UD	GND	GND-J4	UD	UD	GND	GND-J4	UD	UD
2	GND	UD	UD	GND-J4	GND	UD	UD	GND-J4	GND
3	UD	GND	GND-J4	UD	UD	GND	GND-J4	UD	UD
4	GND	UD	UD	GND-J4	GND	UD	UD	GND-J4	GND
5	UD	GND	GND-J4	UD	UD	GND	GND-J4	UD	UD
6	GND	UD	UD	GND-J4	GND	UD	UD	GND-J4	GND
7	UD	GND	GND-J4	UD	UD	GND	GND-J4	UD	UD
8	GND	UD	UD	GND-J4	GND	UD	UD	GND-J4	GND
9	UD	GND	GND-J4	UD	UD	GND	GND-J4	UD	UD
10	GND	UD	UD	GND-J4	GND	UD	UD	GND-J4	GND
11	UD	GND	GND-J4	UD	UD	GND	GND-J4	UD	UD
12	GND	UD	UD	GND-J4	GND	UD	UD	GND-J4	GND
13	UD	GND	GND-J4	CPtp02-DB-	CPtp02-DB+	GND	GND-J4	CPtp02-DA-	CPtp02-DA+
14	GND	CPtp02-DD-	CPtp02-DD+	GND-J4	GND	CPtp02-DC-	CPtp02-DC+	GND-J4	GND
15	UD	GND	GND-J4	CPtp01-DB-	CPtp01-DB+	GND	GND-J4	CPtp01-DA-	CPtp01-DA+
16	GND	CPtp01-DD-	CPtp01-DD+	GND-J4	GND	CPtp01-DC-	CPtp01-DC+	GND-J4	GND

<b>6U OpenVPX BACKPLANE</b> <b>BKP6-CEN06-11.2.8-4</b>	<b>VITA 46</b> <b>VITA 65</b>	
---	----------------------------------	--

Payload Slot Profile SLT6-PAY-4F2T-10.2.2— P5 & J5

Plug-In Module P5	Row G	Row F	Row E		Row D	Row C	Row B		Row A
			Even	Odd			Even	Odd	
Backplane J5	Row i	Row h	Row g	Row f	Row e	Row d	Row c	Row b	Row a
This connector is all User Defined pins.									

Payload Slot Profile SLT6-PAY-4F2T-10.2.2— P6 & J6

Plug-In Module P5	Row G	Row F	Row E		Row D	Row C	Row B		Row A
			Even	Odd			Even	Odd	
Backplane J5	Row i	Row h	Row g	Row f	Row e	Row d	Row c	Row b	Row a
This connector is all User Defined pins.									

**6U OpenVPX  
BACKPLANE  
BKP6-CEN06-11.2.6-4**

**VITA 46  
VITA 65**



Switch Slot Profile SLT6-SWH-24F-10.4.3 — P1& J1

Plug-In Module P2	Row G	Row F	Row E		Row D	Row C	Row B		Row A
			Even	Odd			Even	Odd	
Bplane J2	Row i	Row h	Row g	Row f	Row e	Row d	Row c	Row b	Row a
1 Data Plane FP Port 20	GDiscrete1	GND	GND-J1	DP20-T0-	DP20-T0+	GND	GND-J1	DP20-R0-	DP20-R0+
	GND	DP20-T1-	DP20-T1+	GND-J1	GND	DP20-R1-	DP20-R1+	GND-J1	GND
	P1-VBAT	GND	GND-J1	DP20-T2-	DP20-T2+	GND	GND-J1	DP20-R2-	DP20-R2+
	GND	DP20-T3-	DP20-T3+	GND-J1	GND	DP20-R3-	DP20-R3+	GND-J1	GND
5 Data Plane FP Port 19	SYS_CON*	GND	GND-J1	DP19-T0-	DP19-T0+	GND	GND-J1	DP19-R0-	DP19-R0+
	GND	DP19-T1-	DP19-T1+	GND-J1	GND	DP19-R1-	DP19-R1+	GND-J1	GND
	Reserved	GND	GND-J2	DP19-T2-	DP19-T2+	GND	GND-J1	DP19-R2-	DP19-R2+
	GND	DP19-T3-	DP19-T3+	GND-J1	GND	DP19-R3-	DP19-R3+	GND-J1	GND
9 Data Plane FP Port 18	UD	GND	GND-J1	DP18-T0-	DP18-T0+	GND	GND-J1	DP18-R0-	DP18-R0+
	GND	DP18-T1-	DP18-T1+	GND-J1	GND	DP18-R1-	DP18-R1+	GND-J1	GND
	UD	GND	GND-J2	DP18-T2-	DP18-T2+	GND	GND-J1	DP18-R2-	DP18-R2+
	GND	DP18-T3-	DP18-T3+	GND-J1	GND	DP18-R3-	DP18-R3+	GND-J1	GND
13 Data Plane FP Port 17	UD	GND	GND-J1	DP17-T0-	DP17-T0+	GND	GND-J1	DP17-R0-	DP17-R0+
	GND	DP17-T1-	DP17-T1+	GND-J1	GND	DP17-R1-	DP17-R1+	GND-J1	GND
	Maskable Reset*	GND	GND-J1	DP17-T2-	DP17-T2+	GND	GND-J1	DP17-R2-	DP17-R2+
	GND	DP17-T3-	DP17-T3+	GND-J1	GND	DP17-R3-	DP17-R3+	GND-J1	GND

Switch Slot Profile SLT6-SWH-24F-10.4.3 — P2 & J2

Plug-In Module P2	Row G	Row F	Row E		Row D	Row C	Row B		Row A
			Even	Odd			Even	Odd	
Bplane J2	Row i	Row h	Row g	Row f	Row e	Row d	Row c	Row b	Row a
1 Data Plane FP Port 16	UD	GND	GND-J2	DP16-T0-	DP16-T0+	GND	GND-J2	DP16-R0-	DP16-R0+
	GND	DP16-T1-	DP16-T1+	GND-J2	GND	DP16-R1-	DP16-R1+	GND-J2	GND
	UD	GND	GND-J2	DP16-T2-	DP16-T2+	GND	GND-J2	DP16-R2-	DP16-R2+
	GND	DP16-T3-	DP16-T3+	GND-J2	GND	DP16-R3-	DP16-R3+	GND-J2	GND
5 Data Plane Pay- load FP Port 15	UD	GND	GND-J2	DP15-T0-	DP15-T0+	GND	GND-J2	DP15-R0-	DP15-R0+
	GND	DP15-T1-	DP15-T1+	GND-J2	GND	DP15-R1-	DP15-R1+	GND-J2	GND
	UD	GND	GND-J2	DP15-T2-	DP15-T2+	GND	GND-J2	DP15-R2-	DP15-R2+
	GND	DP15-T3-	DP15-T3+	GND-J2	GND	DP15-R3-	DP15-R3+	GND-J2	GND
9 Data Plane Pay- load FP Port 14	UD	GND	GND-J2	DP14-T0-	DP14-T0+	GND	GND-J2	DP14-R0-	DP14-R0+
	GND	DP14-T1-	DP14-T1+	GND-J2	GND	DP14-R1-	DP14-R1+	GND-J2	GND
	UD	GND	GND-J2	DP14-T2-	DP14-T2+	GND	GND-J2	DP14-R2-	DP14-R2+
	GND	DP14-T3-	DP14-T3+	GND-J2	GND	DP14-R3-	DP14-R3+	GND-J2	GND
13 Data Plane Pay- load FP Port 13	UD	GND	GND-J2	DP13-T0-	DP13-T0+	GND	GND-J2	DP13-R0-	DP13-R0+
	GND	DP13-T1-	DP13-T1+	GND-J2	GND	DP13-R1-	DP13-R1+	GND-J2	GND
	UD	GND	GND-J2	DP13-T2-	DP13-T2+	GND	GND-J2	DP13-R2-	DP13-R2+
	GND	DP13-T3-	DP13-T3+	GND-J2	GND	DP13-R3-	DP13-R3+	GND-J2	GND

**6U OpenVPX  
BACKPLANE**  
**BKP6-CEN06-11.2.8-4**

**VITA 46  
VITA 65**



**Switch Slot Profile SLT6-SWH-24F-10.4.3 — P3 & J3**

Plug-In Module P3	Row G	Row F	Row E		Row D	Row C	Row B		Row A
	Row i	Row h	Even	Odd	Row e	Row d	Even	Odd	Row a
<b>Bplane J3</b>	Row i	Row h	Row g	Row f	Row e	Row d	Row c	Row b	Row a
1	UD	GND	GND-J3	DP12-T0-	DP12-T0+	GND	GND-J3	DP12-R0-	DP12-R0+
2	GND	DP12-T1-	DP12-T1+	GND-J3	GND	DP12-R1-	DP12-R1+	GND-J3	GND
3	UD	GND	GND-J3	DP12-T2-	DP12-T2+	GND	GND-J3	DP12-R2-	DP12-R2+
4	GND	DP12-T3-	DP12-T3+	GND-J3	GND	DP12-R3-	DP12-R3+	GND-J3	GND
5	UD	GND	GND-J3	DP11-T0-	DP11-T0+	GND	GND-J3	DP11-R0-	DP11-R0+
6	GND	DP11-T1-	DP11-T1+	GND-J3	GND	DP11-R1-	DP11-R1+	GND-J3	GND
7	UD	GND	GND-J3	DP11-T2-	DP11-T2+	GND	GND-J3	DP11-R2-	DP11-R2+
8	GND	DP11-T3-	DP11-T3+	GND-J3	GND	DP11-R3-	DP11-R3+	GND-J3	GND
9	UD	GND	GND-J3	DP10-T0-	DP10-T0+	GND	GND-J3	DP10-R0-	DP10-R0+
10	GND	DP10-T1-	DP10-T1+	GND-J3	GND	DP10-R1-	DP10-R1+	GND-J3	GND
11	UD	GND	GND-J3	DP10-T2-	DP10-T2+	GND	GND-J3	DP10-R2-	DP10-R2+
12	GND	DP10-T3-	DP10-T3+	GND-J3	GND	DP10-R3-	DP10-R3+	GND-J3	GND
13	UD	GND	GND-J3	DP09-T0-	DP09-T0+	GND	GND-J3	DP09-R0-	DP09-R0+
14	GND	DP09-T1-	DP09-T1+	GND-J3	GND	DP09-R1-	DP09-R1+	GND-J3	GND
15	UD	GND	GND-J3	DP09-T2-	DP09-T2+	GND	GND-J3	DP09-R2-	DP09-R2+
16	GND	DP09-T3-	DP09-T3+	GND-J3	GND	DP09-R3-	DP09-R3+	GND-J3	GND

**Switch Slot Profile SLT6-SWH-24F-10.4.3 — P4 & J4**

Plug-in Module P4	Row G	Row F	Row E		Row D	Row C	Row B		Row A
	Row i	Row h	Row g	Row f	Row e	Row d	Row c	Row b	Row a
<b>Bplane J4</b>	Row i	Row h	Row g	Row f	Row e	Row d	Row c	Row b	Row a
1	UD	GND	GND-J4	DP08-T0-	DP08-T0+	GND	GND-J4	DP08-R0-	DP08-R0+
2	GND	DP08-T1-	DP08-T1+	GND-J4	GND	DP08-R1-	DP08-R1+	GND-J4	GND
3	UD	GND	GND-J4	DP08-T2-	DP08-T2+	GND	GND-J4	DP08-R2-	DP08-R2+
4	GND	DP08-T3-	DP08-T3+	GND-J4	GND	DP08-R3-	DP08-R3+	GND-J4	GND
5	UD	GND	GND-J4	DP07-T0-	DP07-T0+	GND	GND-J4	DP07-R0-	DP07-R0+
6	GND	DP07-T1-	DP07-T1+	GND-J4	GND	DP07-R1-	DP07-R1+	GND-J4	GND
7	UD	GND	GND-J4	DP07-T2-	DP07-T2+	GND	GND-J4	DP07-R2-	DP07-R2+
8	GND	DP07-T3-	DP07-T3+	GND-J4	GND	DP07-R3-	DP07-R3+	GND-J4	GND
9	UD	GND	GND-J4	DP06-T0-	DP06-T0+	GND	GND-J4	DP06-R0-	DP06-R0+
10	GND	DP06-T1-	DP06-T1+	GND-J4	GND	DP06-R1-	DP06-R1+	GND-J4	GND
11	UD	GND	GND-J4	DP06-T2-	DP06-T2+	GND	GND-J4	DP06-R2-	DP06-R2+
12	GND	DP06-T3-	DP06-T3+	GND-J4	GND	DP06-R3-	DP06-R3+	GND-J4	GND
13	UD	GND	GND-J4	DP05-T0-	DP05-T0+	GND	GND-J4	DP05-R0-	DP05-R0+
14	GND	DP05-T1-	DP05-T1+	GND-J4	GND	DP05-R1-	DP05-R1+	GND-J4	GND
15	UD	GND	GND-J4	DP05-T2-	DP05-T2+	GND	GND-J4	DP05-R2-	DP05-R2+
16	GND	DP05-T3-	DP05-T3+	GND-J4	GND	DP05-R3-	DP05-R3+	GND-J4	GND

**6U OpenVPX  
BACKPLANE  
BKP6-CEN06-11.2.8-4**

**VITA 46  
VITA 65**



**Switch Slot Profile SLT6-SWH-24F-10.4.3 — P5 & J5**

Plug-In Module P5	Row G	Row F	Row E		Row D	Row C	Row B		Row A
	Row i	Row h	Row g	Row f	Row e	Row d	Row c	Row b	Row a
1 Data Plane Pay- load FP Port 4	UD	GND	GND-J5	DP04-T0-	DP04-T0+	GND	GND-J5	DP04-R0-	DP04-R0+
	GND	DP04-T1-	DP04-T1+	GND-J5	GND	DP04-R1-	DP04-R1+	GND-J5	GND
	UD	GND	GND-J5	DP04-T2-	DP04-T2+	GND	GND-J5	DP04-R2-	DP04-R2+
	GND	DP04-T3-	DP04-T3+	GND-J5	GND	DP04-R3-	DP04-R3+	GND-J5	GND
5 Data Plane Pay- load FP Port 3	UD	GND	GND-J5	DP03-T0-	DP03-T0+	GND	GND-J5	DP03-R0-	DP03-R0+
	GND	DP03-T1-	DP03-T1+	GND-J5	GND	DP03-R1-	DP03-R1+	GND-J5	GND
	UD	GND	GND-J5	DP03-T2-	DP03-T2+	GND	GND-J5	DP03-R2-	DP03-R2+
	GND	DP03-T3-	DP03-T3+	GND-J5	GND	DP03-R3-	DP03-R3+	GND-J5	GND
9 Data Plane Pay- load FP Port 2	UD	GND	GND-J5	DP02-T0-	DP02-T0+	GND	GND-J5	DP02-R0-	DP02-R0+
	GND	DP02-T1-	DP02-T1+	GND-J5	GND	DP02-R1-	DP02-R1+	GND-J5	GND
	UD	GND	GND-J5	DP02-T2-	DP02-T2+	GND	GND-J5	DP02-R2-	DP02-R2+
	GND	DP02-T3-	DP02-T3+	GND-J5	GND	DP02-R3-	DP02-R3+	GND-J5	GND
13 Data Plane Pay- load FP Port 1	UD	GND	GND-J5	DP01-T0-	DP01-T0+	GND	GND-J5	DP01-R0-	DP01-R0+
	GND	DP01-T1-	DP01-T1+	GND-J5	GND	DP01-R1-	DP01-R1+	GND-J5	GND
	UD	GND	GND-J5	DP01-T2-	DP01-T2+	GND	GND-J5	DP01-R2-	DP01-R2+
	GND	DP01-T3-	DP01-T3+	GND-J5	GND	DP01-R3-	DP01-R3+	GND-J5	GND

**Switch Slot Profile SLT6-SWH-24F-10.4.3 — P6 & J6**

Plug-In Module P6	Row G	Row F	Row E		Row D	Row C	Row B		Row A
	Row i	Row h	Even	Odd	Row e	Row d	Even	Odd	Row a
1 Data Plane Inter- SW FP Port 4	UD	GND	GND-J6	DS04-T0-	DS04-T0+	GND	GND-J6	DS04-R0-	DS04-R0+
	GND	DS04-T1-	DS04-T1+	GND-J6	GND	DS04-R1-	DS04-R1+	GND-J6	GND
	UD	GND	GND-J6	DS04-T2-	DS04-T2+	GND	GND-J6	DS04-R2-	DS04-R2+
	GND	DS04-T3-	DS04-T3+	GND-J6	GND	DS04-R3-	DS04-R3+	GND-J6	GND
5 Data Plane Inter- SW FP Port 3	UD	GND	GND-J6	DS03-T0-	DS03-T0+	GND	GND-J6	DS03-R0-	DS03-R0+
	GND	DS03-T1-	DS03-T1+	GND-J6	GND	DS03-R1-	DS03-R1+	GND-J6	GND
	UD CPTp02- DB+	GND	GND-J6	DS03-T2-	DS03-T2+	GND	GND-J6	DS03-R2-	DS03-R2+
	GND	DS03-T3-	DS03-T3+	GND-J6	GND	DS03-R3-	DS03-R3+	GND-J6	GND
9 Data Plane Inter- SW FP Port 2	UD	GND	GND-J6	DS02-T0-	DS02-T0+	GND	GND-J6	DS02-R0-	DS02-R0+
	GND	DS02-T1-	DS02-T1+	GND-J6	GND	DS02-R1-	DS02-R1+	GND-J6	GND
	UD	GND	GND-J6	DS02-T2-	DS02-T2+	GND	GND-J6	DS02-R2-	DS02-R2+
	GND	DS02-T3-	DS02-T3+	GND-J6	GND	DS02-R3-	DS02-R3+	GND-J6	GND
13 Data Plane Inter- SW FP Port 1	UD	GND	GND-J6	DS01-T0-	DS01-T0+	GND	GND-J6	DS01-R0-	DS01-R0+
	GND	DS01-T1-	DS01-T1+	GND-J6	GND	DS01-R1-	DS01-R1+	GND-J6	GND
	UD	GND	GND-J6	DS01-T2-	DS01-T2+	GND	GND-J6	DS01-R2-	DS01-R2+
	GND	DS01-T3-	DS01-T3+	GND-J6	GND	DS01-R3-	DS01-R3+	GND-J6	GND





**6U OpenVPX  
BACKPLANE  
BKP6-CEN10-11.2.8-4**

**VITA 46  
VITA 65**



## 6) I2C connector

There are 2 connectors for system-management I2CA and I2CB.

For customer specific board assembly Zero-Ohm resistors available.

Usable voltages for I2C are 3.3V-AUX

### I2CA


1	I2CA_SCL
2	GND
3	I2CA_SDA
4	I2CA_PWR
5	NC

### I2CB

1	I2CB_SCL
2	GND
3	I2CB_SDA
4	I2CB_PWR
5	NC

## 7) Power Studs M3

The main operating voltages (+12V, +3.3V, +5V) and GND are supplied with M3 screw terminals. The auxiliary operating voltages are supplied via M3 screw terminals. Optimal daughter board supply and trouble-free operation are ensured by the arrangement of the feed modules on the backplane.

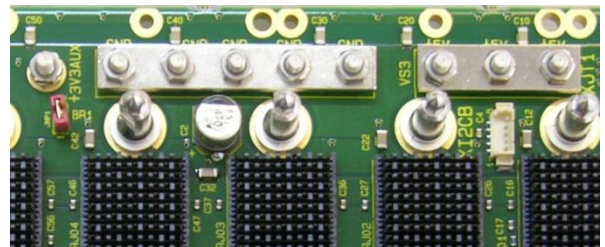


## 8) XBAT

Normally a battery voltage with approximately 3V is available at Pin VBAT of connector VPX-J1. The voltage is externally accessible with connector XBAT, Pin2 or internally using 3.3V\_AUX by setting a Jumper between Pin2 and Pin3.

### VBAT X5

1	GND
2	+VBAT
3	+3.3V_AUX




## 9) NVMRO

If Jumper BR1 is closed NVRMO is set to memory writeable.

### BR1

1	NVMRO
2	GND



### Germany

Hartmann Electronic GmbH  
Phone: +49 711 13 98 90  
Fax: +49 711 8 66 11 91  
[vertrieb.he@kontron.com](mailto:vertrieb.he@kontron.com)  
[www.hartmann-electronic.com](http://www.hartmann-electronic.com)

### USA

Kontron  
Fabian Hemmann  
Phone: +1 937-324-2420  
Mobile: +1 937 346 7878  
[fabian.hemmann@us.kontron.com](mailto:fabian.hemmann@us.kontron.com)  
[www.hartmann-electronic.com](http://www.hartmann-electronic.com)

### France

Kontron Modular Computers S.A.S.  
Serge Pichat  
Phone: +33 (0)9 66 44 03 15  
Mobile: +33 (0)6 82 62 16 00  
[Serge.pichat@kontron.com](mailto:Serge.pichat@kontron.com)  
[www.hartmann-electronic.com](http://www.hartmann-electronic.com)

### India

Hartmann Electronic GmbH  
Vivek Deshpande  
Phone: +1 91 20 66 74 51 23  
[Vivek.Deshpande@kontron.com](mailto:Vivek.Deshpande@kontron.com)  
[www.hartmann-electronic.com](http://www.hartmann-electronic.com)