




VPX Power
3U / 6U



Power Supplies 3U and 6U

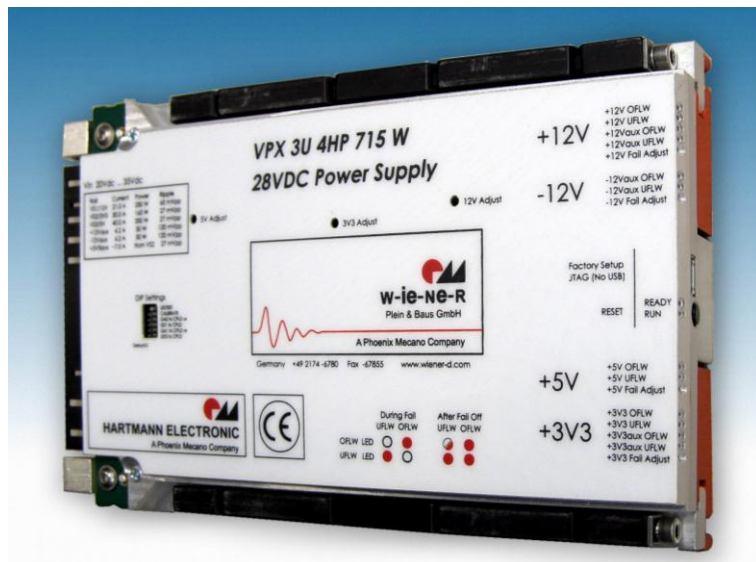



VPX Power 3U / 6U





VPX Power 3U / 6U



Rev:		
R 0.9	30.06.2015	
R 1.0	13.07.2015	
R 1.0	06.08.2015	

Impressum:

Hartmann Electronic GmbH
 Motorstraße 43, D-70499 Stuttgart (Weilimdorf)
 Telefon + 49 711 1 39 89-0
 Telefax + 49 711 8 66 11 91
 E-mail info@hartmann-electronic.com
 Internet www.hartmann-electronic.com

Hartmann Electronic is an established leader in the design and manufacturing of backplanes and electronic packaging for micro-computer systems. With over 30 years of experience in high-speed backplane design and manufacturing, Hartmann offers an extensive range of standard backplanes and system platform products supporting architectures including VME/64x, CompactPCI/2.16, AdvancedTCA, VPX, VXS, VXI, CompactPCIe, and others.

Copyright © 2014, 2015

All rights and technical modifications reserved.



VPX Power 3U / 6U



Table of Contents

1	Power Supply 3U 4TE 715W, DC/DC, conduction cooled.....	5
1.1	Key Features.....	5
1.1.1	Block diagram	6
1.1.2	Front panel	7
1.1.3	Control Logic:.....	7
1.1.4	Technical Specification	7
1.1.5	Compatibility	9
1.1.6	Switch-On Behavior	10
2	Power Supply 3U 10HP 600W, AC/DC, air cooled	11
2.1	Key Features.....	11
2.2	LED Status:.....	11
2.2.1	Technical Specification	12
2.2.2	P0 Connector Pin Out	13
3	Power Supply 6U 8HP 1300W, DC/DC, air & conduction cooled	14
3.1	Key Features.....	14
3.1.1	Front panel	15
3.1.2	LED Status:.....	15
3.1.3	Air cooled version	16
3.1.4	Conduction cooled version	17
3.1.5	Technical Specification	18
3.1.6	P0 Connector Pin Out	19
3.1.7	P1 Connector Pin Out	19
4	Power Supply 6U 10HP 850W, AC/DC, air cooled	21
4.1	Key Features.....	21
4.1.1	Technical Specification	22
4.1.2	P0 Connector Pin Out	23
4.1.3	P1 Connector Pin Out	23
5	Available Accessories	25

List of Figures

<i>Figure 1 Block diagram 3U</i>	<i>6</i>
<i>Figure 2 Front panel functional elements of the VPX3C Power Supply.....</i>	<i>7</i>
<i>Figure 3 Startup Delay and Exponential Rise (orange) of VS1 = 12V Output Voltage.....</i>	<i>10</i>
<i>Figure 4 Front panel 6U.....</i>	<i>15</i>
<i>Figure 5 Air cooled version</i>	<i>16</i>
<i>Figure 6 Conduction cooled version</i>	<i>17</i>



VPX Power 3U / 6U



1 Power Supply 3U 4TE 715W, DC/DC, conduction cooled

1.1 Key Features

- Compliant to VITA 62 baseline specification
- Up to 715 Wmax. Power *
- 600 W over all
- up to 21A for +12V :VS1
- up to 50A for +3.3V :VS2
- up to 40A for +5V :VS3
- +12V / -12V AUX 4.2A
- +3V3 AUX 7A
- up to 88% efficiency
- -40 to +85°C Operating Temperature **
- Voltage sense controlled ***
- 19 – 35 V DC INPUT
- Minimum Input Voltage start up rise time > 50 V/s
- * Derating: ~2% Wattage per Kelvin from 40°C on **
- ** At hottest outer case temperature / wedge lock edge temp. values in work
- *** Over Voltage, Under Voltage, Over Current, Over Temperature
Shutdown control over each power rail, common control via VITA62 control bus
- Storage Temperature: -40°C to +100°C
- Weight: 0.6kg/1.23 Lbs
- Isolation Voltage: 500V
- Used in parallel mode with Hartman PSUs and Power-Backplanes



Order Number: D575.00701

1.1.1 Block diagram

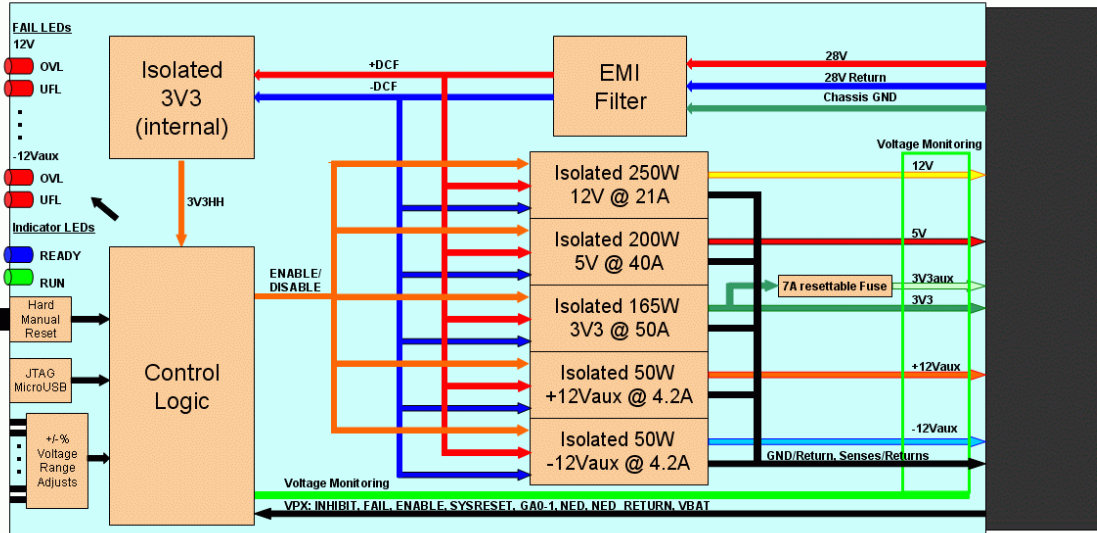


Figure 1 Block diagram 3U

All voltage ZVS converters are isolated (1500V isolation voltage) and fed via a common Filter Network from the same 28V main supply (19V – 35V, shortly 36V). 3V3aux is not independent but protected by a resettable fuse (PTC). All individual output voltages (6x) are sensed by window comparators for over- and under voltages which are monitored from a central control logic device (CPLD). Any failure on the output voltages are signaled on the front panel by corresponding FAIL LEDs and lead to a switch off of all voltages (by default). If all internals are normal the blue READY LED is working. Figure 1 show gives an overview over the front panel elements.

For correct operation all sens signals has to be connected

1.1.2 Front panel



Figure 2 Front panel functional elements of the VPX3C Power Supply

1.1.3 Control Logic:

Depending on the main bus signals also the green RUN LED goes on and the power supply tries to start working. According to VITA 62 and VITA 46 the logic *run line condition* is – when “#” is nomenclature for the negative logic main bus signals, logic negation is signaled by the “¬” sign, and a positive logic transition by “↑”:

$$\text{RUN} = (\neg \# \text{ENABLE AND } \# \text{INHIBIT AND } \# \text{FAIL AND } \neg \text{INTERNAL_FAIL}) \\ \text{“REFRESHED AFTER FAIL WHEN”} \\ \uparrow (\neg \# \text{SYSRESET})$$

This means that if the global inhibit is not set (= released to H), whether no internal or external failure occurs (both are released to H) the power supply starts.

1.1.4 Technical Specification

Form Factor	3U VPX CC
Pitch	4HP / 0.8 inch
Weight	0.6 kg / 1.23 Lbs / 21.2 oz.
Storage Temperature	-55°C to 105°C
Operating Temperature	-40°C to 85°C
Input to Output Insulation	1500V
Input to Output Isolation with Case	550V
Input to Case Ground Isolation	500V
Output to Case Ground Isolation	50V
Case Ground to Safety Ground Resistance	< 10 mΩ



VPX Power 3U / 6U



Main Power

Maximum Output Power	715W
Maximum Input Power	~760W
Maximum Dissipated Power @ max. Power	~45W
Minimum Turn ON Voltage	20 V
Minimum Turn OFF Voltage	19 V
Hysteresis	1 V
Maximum Continuous Input Voltage	35 V
Maximum Short Time Input Voltage	(15 s) 36 V
Maximum Currents 12V / 3V3 / 5V	21 A / 50 A / 40 A
Fixed Switching Frequencies 12V / 3V3 / 5V	120 kHz / 125 kHz / 130 kHz
Peak Efficiencies 12V / 3V3 / 5V	94% / 92% / 92%
Max. Output Ripple and Noise: 12V / 3V3 / 5V	15 mVrms / 4 mVrms / 4 mVrms
(0-20 MHz Bandwidth)	65 mVpp / 27 mVrms / 27 mVpp
Line Regulation: 12V / 3V3 / 5V.	40 mV / 2 mV / 4 mV
Vin=Vin,min to Vin,max, Io and Tc fixed	< 0.1%
Load Regulation: 12V / 3V3 / 5V	70 mV / 2 mV / 4 mV
Vin=Vin,nom, Io=Io,min to Io,max, Tc fixed	< 0.1%
Controlled Overvoltage Protection: +/-12V / 3V3 / 5V	+ 0 %..+ 50 % variable by trimmer. + 5..7 % per factory setup
Uncontrolled	14.4 V / 4.1 V / 6.1 V (hardware)
Controlled Undervoltage Protection: +/-12V / 3V3 / 5V	- 0 %.- 50 % variable by trimmer - 5..7% per factory setup
Temperature Protection Sensing Point (identical to case)	85°C (Latching)
Maximum Internal Working Temperatures	125°C

Auxiliary +/-12V Power

Maximum Current	4.2 A
Fixed Switching Frequency	900 kHz
Efficiency	88%
Max. Output Ripple and Noise (0-20 MHz Bandwidth)	120 mVpp / 30 mVrms
Load Transient Recovery Time	100 µs

Control Logic

Failure hold time	0.5..1 s*
Full* Shutdown	OVC, OVT, OFLW, UFLW

Timing

Minimum Hold up Time (at max. Power)	~ 1 ms
Minimum input voltage start up rise time	> 50 V/s
Output voltage rise time: 12 V / 3V3 / 5V / 12Vaux	38 V/s, 30 V/s, 27 V/s, 30 V/s (exponential)
Startup Delay time: 12 V / 3V3 / 5V / +/- 12Vaux	30 ms, 28 ms, 30 ms, 80 ms
*by default firmware	



VPX Power 3U / 6U



1.1.5 Compatibility

VDE 0805

IEC 950

Tested and passed:

- Altitude: MIL-STD-810F, Methode 500.4, Procedure II
- Vibration: MIL-STD-810G, Methode 514.6 D-1, Category 12
- Shock: MIL-STD-810F, Methode 516.6, Procedure I

1.1.6 Switch-On Behavior

All voltage outputs are switched on exponentially with relatively slow rise times of 30-80 ms and do settle smooth to the final voltage without any overshoot or glitch.

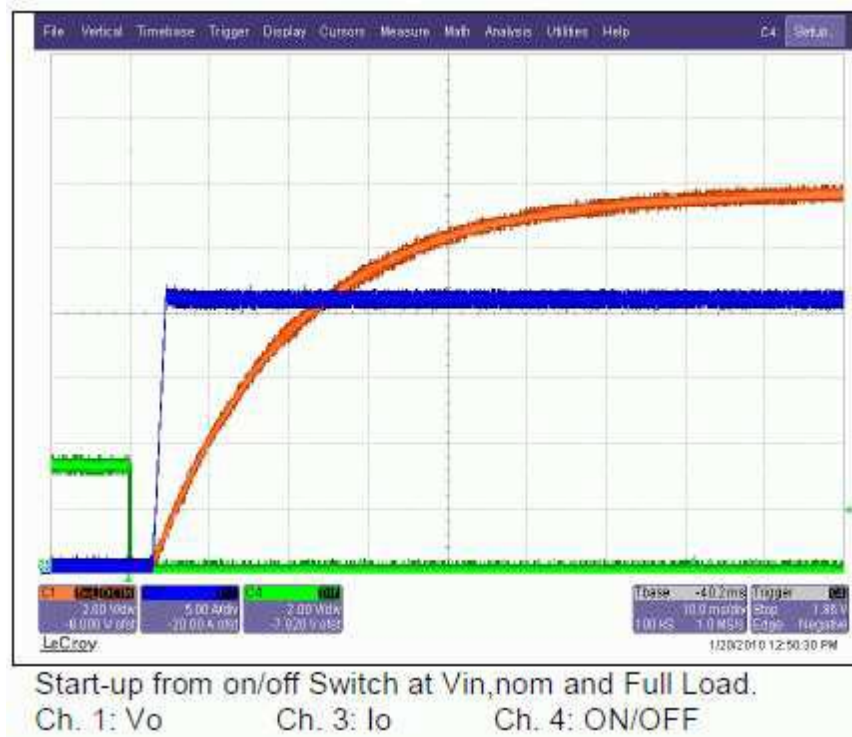


Figure 3 Startup Delay and Exponential Rise (orange) of $V_{S1} = 12V$ Output Voltage

The power supply has to be switched on by a source of a minimum ramp up speed of the 28V source voltage of $> 50 \text{ V/s}$ or a maximum ramp up time $< \sim 500 \text{ ms}$. If the ramp up time is longer than half a second the control logic may stall during switch on.



2 Power Supply 3U 10HP 600W, AC/DC, air cooled

2.1 Key Features

- Form factor: 3 U/10HP
- Efficiency: up to 89%
- Input Frequency: 47-63Hz
- Input Voltage: 85 – 264Vac
- Input Current: 6A (600W output at 120Vrms input)
- Inrush Current: 20A (at 265Vrms)
- Output Voltage: 12V/28A: VS1
3.3V/19A: VS2
5V/25A: VS3
±12VAUX/1A
3V3AUX/6A
- Isolation Voltage: Input to Output:4000Vac
Input to Chassis: 1500Vac
Output to Chassis 250Vdc
Output to Output 250Vdc
- Cooling with low noise Fan installed
- Used in parallel mode with Hartman PSUs and Power-Backplanes

Order Number: D575.00643



2.2 LED Status:

AC OK	PSU is in Standby
ENABLE	EN is activated, PSU running



VPX Power 3U / 6U



2.2.1 Technical Specification

Form Factor	3U
Pitch	10HP
Weight	650g
Storage Temperature	-40°C to +85°C
Operating Temperature	-20°C to +70°C
Input to Output Insulation	4000Vac
Input	
Input Voltage	85 – 264Vac
Input Current:	6A (600W output at 120Vac input)
Inrush Current:	20A (at 265Vac)
Output	
Maximum Output Power (85 – 264Vac)	600W
Max. Currents 3.3V / 12V / 5V	19A / 28A / 25A
Over Current Protection (% of rated current)	105% - 125%
Ripple and Noise (20MHz BW, pk – pk)	1%Vnom
Holdup Time (600W output at 120Vrms input)	min. 17ms, typ 20ms, max 21
Turn ON Rise Time 3.3V / 12V / 5V	1,5-3,5ms
Turn ON Delay (AC to PG) 3.3V / 12V / 5V	750ms
Line Regulation: 3.3V / 12V / 5V	±1%Vnom / ±1%Vnom / ±1%Vnom
Load Regulation: 3.3V / 12V / 5V	±50 mV / ±100 mV / ±50 mV
Overvoltage Protection: 3.3V / 12V / 5V /	9,5V / 18V / 9,5V
Over Temperature Protection (internal monitored.)	+115C° - 125°C (Latching)
Efficiency	86% - 89%
Auxiliary ±12VAUX / 3V3AUX Power	
Input +12V / 3,3V	
Maximum Current ±12VAUX / 3V3AUX	1 A / 6A
Current Protection (Fuse) ±12VAUX / 3V3AUX	1,5A / 6A
Connector	
Vita 62, Tyco 6450849-7	



VPX Power 3U / 6U



2.2.2 P0 Connector Pin Out

PART NUMBER	ROWS	POWER			SIGNAL								POWER					
		P1	P2	LPI	1	2	3	4	5	6	7	8	P3	P4	P5	LP2	P6	
6450849-7	D	TT	TT	LT	Z5	Z5	Z5	Z5	Z5	Z5	Z5	Z5	TT	TT	TT	LT	TT	
	C				Y5	Y5	Y5	Y5	Y5	Y5	Y5							
	B				R5	R5	R5	R5	R5	R5	R5							
	A				O5	O5	O5	O5	O5	O5	O1							
2ACP+1LP+32S+3HDP+1LP+1HDP																		

Pin Number	Voltage	Current	Assignment
P6	+12V	28A	VS1
LP2	+3,3V	6A	VS2
P4, P5	Return of all output		PWR_RET
P3	+5V	25A	VS3
D8	GND_SENSE		SENSE_RET
C8	+5V_SENSE		VS3_SENSE
B8	+3,3V_SENSE		VS2_SENSE
A8	+12V_SENSE		VS1_SENSE
D7			SIG_RET
C7	+5V_SHARE		VS3_SHARE
B7	+3,3V_SHARE		VS2_SHARE
A7	+12V_SHARE		VS1_SHARE
D6			SYS_RESET /ACOK
C6	-12V AUX	1A	
B6	n/a		SM3
A6	n/a		SM2
D5	n/a		SM1
C5	n/a		SM0
B5	n/a		GA1
A5	n/a		GA0
D4	+3,3V AUX	6A	
C4	+3,3V AUX		
B4	+3,3V AUX		
A4	+3,3V AUX		
D3	n/a		NED_RET
C3	n/a		NED
B3	+12V AUX	1A	
A3	n/a		UD0
D2			ENABLE
C2			INHIBIT
B2	PG		FAIL
A2	n/a		VBAT
D1	n/a		UD4
C1	n/a		UD3
B1	n/a		UD2
A1	n/a		UD1
LP1			CHA_GND
P2	85 – 264Vac	6A max.	Line
P1			Neutral



3 Power Supply 6U 8HP 1300W, DC/DC, air & conduction cooled

3.1 Key Features

- Compliant to VITA 62 baseline specification
- 1.300 W over all
- up to 100A for 12V
- up to 70A for 5V, (80A)*
- up to 30A for 3.3V, (50A)*
- +12V / -12V AUX 1,25A
- up to 92% efficiency
- -40 to +85°C Operating Temperature
- Voltage sense controlled
- 24V or 48V DC INPUT
- conduction cooled or air cooled

*customized possible

24V air cooled 12V: D575.00502

- 24V DC Input (18V to 36V)
- +12V / -12V AUX 1.25A 87% efficiency
- +3.3V AUX 30A 85% efficiency
- +12V 100A 92% efficiency

24V air cooled 5V: D575.00512

- 24V DC Input (18V to 36V)
- +12V / -12V AUX 1.25A 87% efficiency
- +3.3V AUX 30A 85% efficiency
- + 5V 70A 90% efficiency
- +12V 50A 92% efficiency

- 24V conduction cooled 12V: D575.00501CC
- 24V conduction cooled 5V: D575.00631
- ruggedized version optional on request
- parallel and redundancy mode optional on request

- All version also available in 48V DC power in





VPX Power 3U / 6U



All voltage converters are isolated (1500V isolation voltage) and fed from the same 24V main supply (18V – 36V) protected by two (DCin1, DCin2”) 40A fuses.

The “Power LED” is controlled by the “Power Good Signal” of the 12V converter.

The output voltages (+12V, +5V, 3,3V) are sensed for over- and under voltages which are monitored from the control logic in every converter. Any failure on the output voltages are signalled on the front panel by corresponding FAIL LED (OFF). In according to Vita62, the “FAIL-Signal” is connected to the “FAIL Pin” (B2) at the P1 connector. If all voltages are in normal conditions all FAIL LED’s (green) are ON

Figure 4 shows an overview over the front panel elements.

3.1.1 Front panel

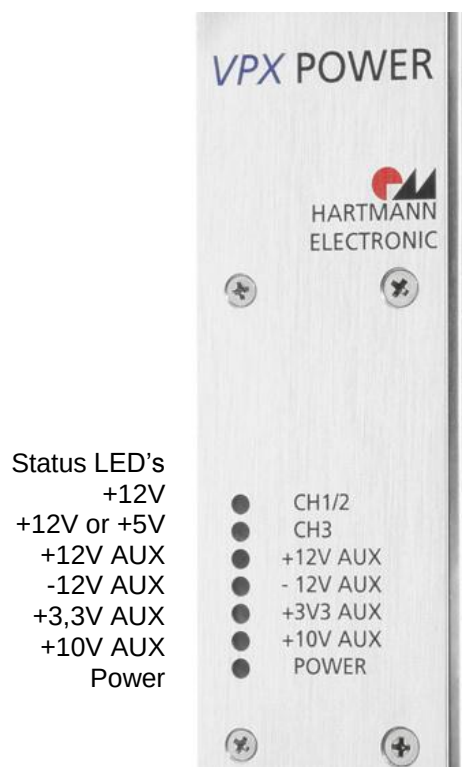


Figure 4 Front panel 6U

3.1.2 LED Status:

Power (LED green ON/OFF)

Indicates input power is present (LED ON)

CH1/2 (LED green ON/OFF)

CH3 (LED green ON/OFF)

+12V AUX (LED green ON/OFF)

-12V AUX (LED green ON/OFF)

+3,3V AUX (LED green ON/OFF)

+10V AUX (LED green ON/OFF)

Indicates the output power:

Power is present (inside of the specified range) = LED ON

Power is not present (not inside of the specified range) = LED OFF



3.1.3 Air cooled version

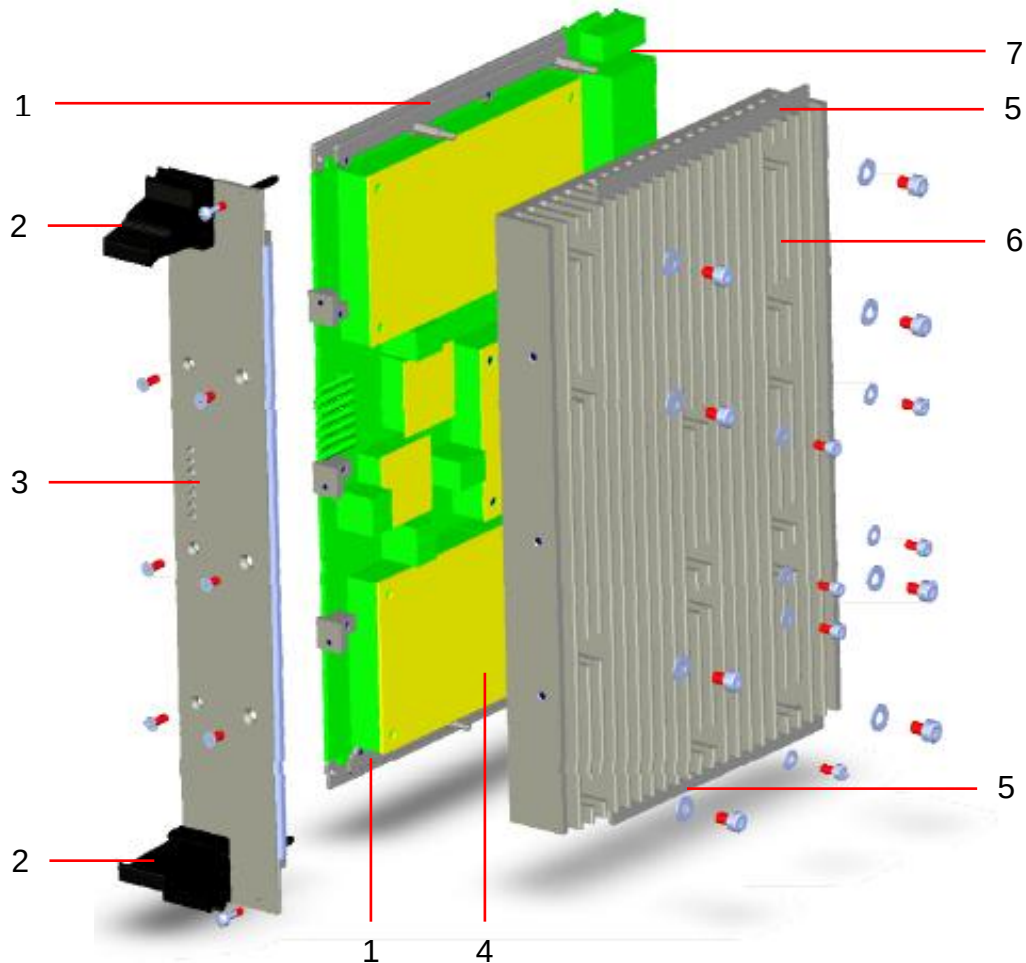


Figure 5 Air cooled version

- | | |
|--------------------------|----------------------|
| 1. Guide rail | 2. Handle |
| 3. Front panel | 4. Converter (1 – 4) |
| 5. Runner | 6. Heat sink |
| 7. Printed circuit board | |

3.1.4 Conduction cooled version

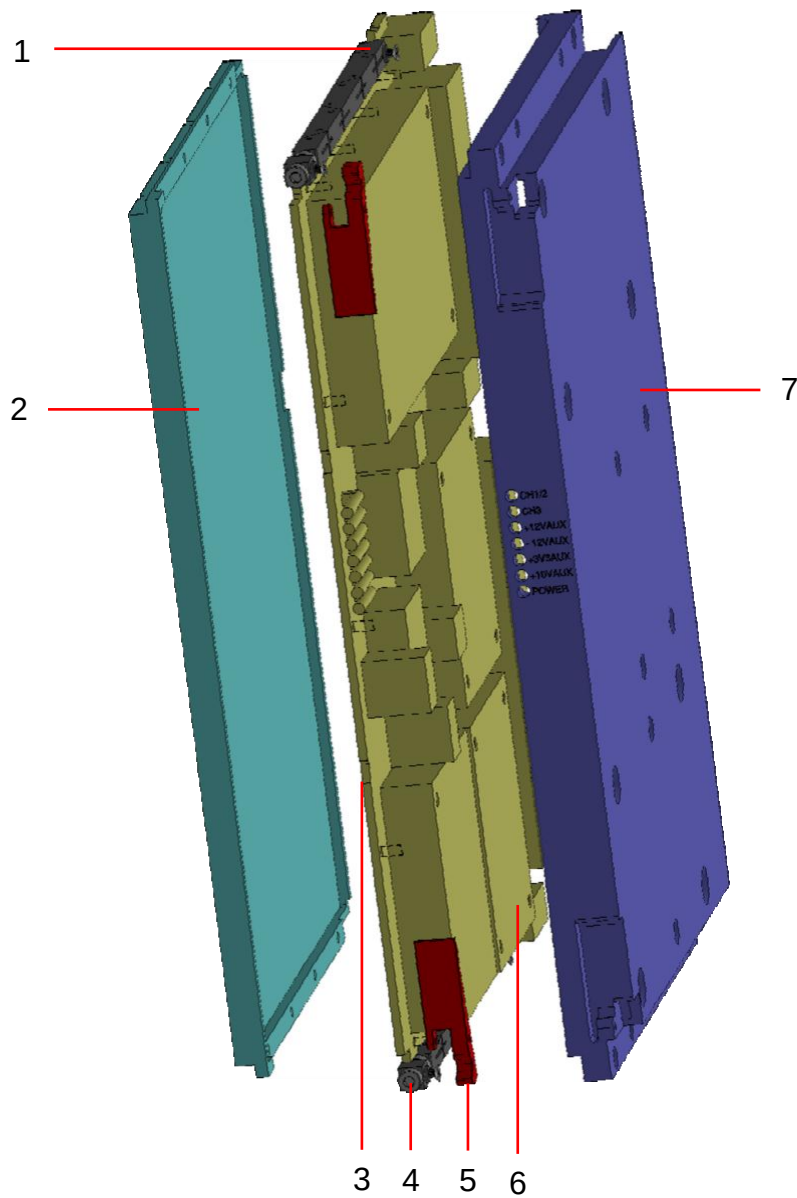


Figure 6 Conduction cooled version

- | | |
|--------------------------|----------------------|
| 1. Upper wedgelock | 2. Bottom cover |
| 3. Printed circuit board | 4. Lower wedgelock |
| 5. Handle | 6. Converter (1 – 4) |
| 7. Top cover | |



VPX Power 3U / 6U



3.1.5 Technical Specification

Form Factor	6U
Pitch	8HP
Weight	2,0 kg
Storage Temperature	-55°C to 85°C
Operating Temperature	-40°C to 85°C
Input to Output Insulation	1500V
Main Power	
Maximum Output Power	1300W
Input Voltage 12V / 3,3V AUX / 5V	24Vdc (18Vdc – 36Vdc)
24V air cooled 12V: D575.00501	
Max. Currents 12V / 3,3V AUX	100 A / 30 A
Efficiencies 12V / 3,3	92% / 85%
24V air cooled 5V: D575.00512	
Max. Currents 12V / 3,3V AUX / 5V	50 A / 30 A / 70 A
Efficiencies 12V / 3,3V AUX / 5V	92% / 85% / 90%
Minimum Turn ON Voltage 12V / 3,3V / 5V	16,9V / 16,9V / 19,9V
Minimum Turn OFF Voltage 12V / 3,3V / 5V	16,0V / 16,0V / 18,8V
Hysteresis 12V / 3,3V / 5V	1,1V / 0,9V / 0,9V
Startup Delay Time from application of input voltage 12V / 3,3V / 5V	20ms / 18ms / 18ms
Startup Delay Time from on/off 12V / 3,3V / 5V	3ms / 3ms / 3ms
Fixed Switching Frequencies 12V / 3,3 / 5V	120 kHz / 125 kHz / 130 kHz
Max. Output Ripple and Noise: 12V / 3,3 / 5V (0-20 MHz Bandwidth)	15 mVrms / 4 mVrms / 4 mVrms 65 mVpp / 27 mVrms / 27 mVpp
Line Regulation: 12V / 3V3 / 5V.	40 mV / 2 mV / 4 mV
Load Regulation: 12V / 3V3 / 5V	70 mV / 2 mV / 4 mV
Overvoltage Protection: 12V / 3V3 / 5V	14,4V / 4,1V / 6,1V
Temperature Protection Sensing Point (identical to case)	85°C (Latching)
Maximum Internal Working Temperatures	115°C
Auxiliary +/-12V Power	
Input Voltage	24Vdc (18Vdc – 36Vdc)
Maximum Current	1,25 A
Input Under-Voltage Turn ON 18V / 24V / 36V	16,2V / 17,0V / 17,8V
Input Under-Voltage Turn OFF 18V / 24V / 36V	15,1V / 16,0V / 16,7V
Input Over-Voltage Turn ON 18V / 24V / 36V	37,8V / 40,0V / 41,7V
Input Over-Voltage Turn OFF 18V / 24V / 36V	38,6V / 40,7V / 42,6V
Fixed Switching Frequency	900 kHz
Efficiency	86,5%
Max. Output Ripple and Noise (0-20 MHz Bandwidth)	140 mVpp
Load Transient Recovery Time	100 µs
Over Current Protection	15A
Connector	
Vita 62 Tyco 6450843-6, 6450849-6	



3.1.6 P0 Connector Pin Out

PART NUMBER	ROWS		POWER							
			P1	P2	P3	P4	P5	P6	P7	
6450843-6	D C B A		TT	TT	TT	TT	TT	TT	TT	

Pin Number	Voltage	Current (A)	Pin Name
P7	+DC_IN_1	40	+DC_In/cCL/L1
P6	+DC_IN_2	40	+DC_IN/L2
P5	-DC_IN	40	-DC_IN/L3
P4	-DC_IN	40	-DC_In/cCN
P3	n/c		POS_FILT_OUT
P2	n/c		NEG_FILT_OUT
P1	CHA_GND	40	CHASSIS

3.1.7 P1 Connector Pin Out

PART NUMBER	ROWS	POWER		SIGNAL		POWER				SIGNAL				POWER		SIGNAL			POWER		
		P1	P2	1	2	P3	P4	P5	P6	3	4	5	6	P7	P8	7	8	9	P9	P10	
6450849-6	D C B A	TT	TT	Z5 Y5 R5 O5	Z5 Y5 R5 O5	TT	TT	TT	TT	Z5 Y5 R5 O5	Z5 Y5 R5 O5	Z5 Y5 R5 O5	Z5 Y5 R5 O5	TT	TT	Z5 Y5 R5 O5	Z5 Y5 R5 O5	Z5 Y5 R5 O5	TT	TT	

Pin Number	Voltage	Current (A)	Pin Name
P10	PO12	40	PO1
P9	PO13	40	PO2
A9	PO12_SENSE	<1A	PO1_SENSE
B9	PO12_SENSE	<1A	PO2_SENSE
C9	PO3_SENSE	<1A	PO3_SENSE
D9	n/c	<1A	UD0
A8	PO12_GND_SENSE	<1A	PO1_SENSE_RTN
B8	PO12_GND_SENSE	<1A	PO2_SENSE_RTN
C8	PO3_GND_SENSE	<1A	PO3_SENSE_RTN
D8	n/c	<1A	UD1
A7	PO12_SHARE	<1A	PO1_SHARE
B7	PO12_SHARE	<1A	PO2_SHARE
C7	PO3_SHARE	<1A	PO3_SHARE
D7	GND	<1A	SIGNAL_RETURN
P8	GND	40	POWER_RETURN
P7	GND	40	POWER_RETURN





A6	n/c	<1A	SM2
B6	n/c	<1A	SM3
C6	-12V_AUX	<1.5A	-12V_AUX
D6	n/c	<1A	SYSRESET*
A5	n/c	<1A	GAP*
B5	n/c	<1A	GA4*
C5	n/c	<1A	SM0
D5	n/c	<1A	SM1
A4	n/c	<1A	GA3*
B4	n/c	<1A	GA2*
C4	n/c	<1A	GA1*
D4	n/c	<1A	GA0*
A3	n/c	<1A	UD2
B3	+12V_AUX	<1.5A	+12V_AUX
C3	n/c	<1A	NED
D3	n/c	<1A	NED_RETURN
P6	PO3	40	PO3
P5	PO3	40	PO3
P4	GND	40	POWER_RETURN
P3	GND	40	POWER_RETURN
A2	n/c	<1A	VBAT
B2	PWROK	<1A	FAIL*
C2		<1A	INHIBIT*
D2	PS_ON	<1A	ENABLE*
A1	n/c	<1A	UD3
B1	C	<1A	UD4
C1	C	<1A	UD5
D1	n/c	<1A	UD6
P2	3.3V_AUX		3.3V_AUX
P1			POWER_RETURN

4 Power Supply 6U 10HP 850W, AC/DC, air cooled

4.1 Key Features

- Form factor: 6U/10HP
- Efficiency: 86% at 230VAC
- Input Frequency: 47-63Hz
- Inrush Current: 10A (rms) at 230VAC,
37.2A (peak) at 230VAC
- Input Current: 7.1A at 115VAC,
4.3A at 230VAC
- Output Power: 670W at 90-180VAC,
850W at 180-264VAC
- Hold-Up Time: 5.3ms at 115VAC,
2.2ms at 230VAC
- Line Regulation: Typ. 1%
- Load Regulation: VO1/2/3 typ. $\pm 2\%$
- Noise & Ripple: Typ 1% pk-pk.
- Current Sharing: Active current sharing at VO1,2,3
- DC OK Signal: Available for each output
- Power OK Signal: Available for each output
- Operating temperature: -40°C to $+70^{\circ}\text{C}$
- Storage temperature: -45°C to $+85^{\circ}\text{C}$
- Air cooled version, at least 800LFM
- compliant to VITA 62 baseline specification
- Used in parallel mode with Hartman PSUs and Power-Backplanes

Order number: D575.00660

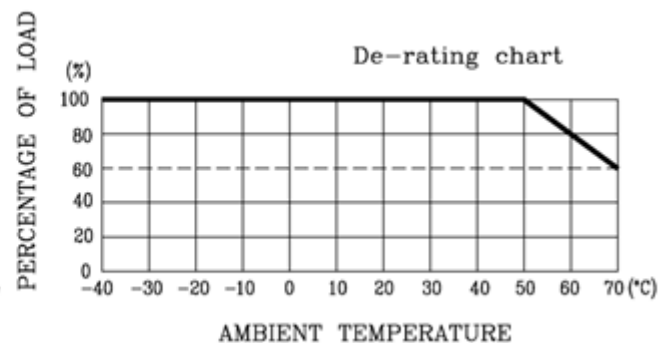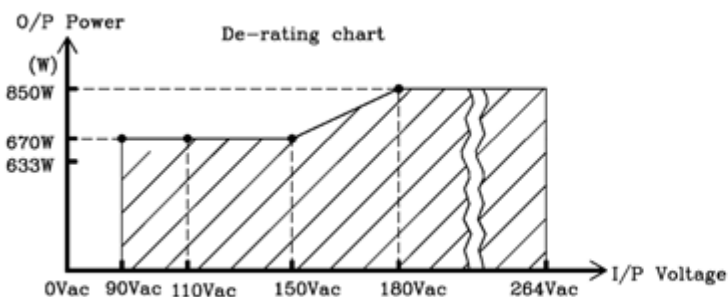



VPX Power 3U / 6U



4.1.1 Technical Specification

Form Factor	6U
Pitch	10HP
Weight	2,0 kg
Storage Temperature	-45°C to +85°C
Operating Temperature	-40°C to +70°C
Input to Output Insulation	1500V
Input	
Input Voltage	90 - 264Vac
Input Frequency	47-63Hz
Input Current:	7,1A at 115Vac /4,3A at 230Vac)
Inrush Current:	10A (rms) at 230VAC 37.2A (peak) at 230VAC
Output	
Maximum Output Power	850W (at 180 - 264Vac) 670W (at 90 - 180Vac)
Max. Currents 12V / 5V	60A / 25A
Efficiencies	86% at 230VAC
Hold-Up Time:	5.3ms at 115VAC, 2.2ms at 230VAC
Line Regulation	Typ. 1%
Load Regulation	VO1/2/3 typ. $\pm 2\%$
Noise & Ripple	Typ 1% pk-pk.
Current Sharing:	Active current sharing at VO1,2,3
DC OK Signal:	Available for each output
Power OK Signal:	Available for each output
Over Current Protection	
Auxiliary Power +/-12V / 3,3V	
Maximum Current	2A / 20A
Hold-Up Time:	5.3ms at 115VAC, 2.2ms at 230VAC
Connector	
Vita 62 Tyco 6450843-6, 6450849-6	




VPX Power 3U / 6U



4.1.2 P0 Connector Pin Out

Pin Number	Voltage	Rated Current (A)	Assignment
P7	100 - 120V 200 - 240V	5,6A - 4,2A	Line
P4			Neutral
P1			GND

4.1.3 P1 Connector Pin Out

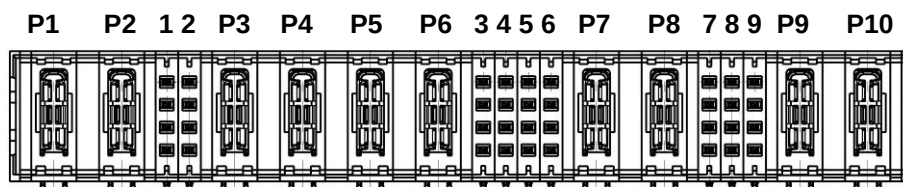

P1	P2	D1	D2	P3	P4	P5	P6	D3	D4	D5	D6	P7	P8	D7	D8	D9	P9	P10
COM	Vo3 3,3V AUX	PS_ RNT	EN	COM	COM	Vo2 P03 +5V	Vo2 P03 +5V	n/a	A0	n/a	SYS RST	COM	COM	COM	DEG	I/P_ OK	Vo1 P01 +12V	Vo1 P03 +12V
		C1	C2					C3	C4	C5	C6			C7	C8	C9		
		V3 +S	INH					n/a	A1	n/a	Vo5 AUX -12V			V2 CS	V2 -S	V2 +S		
		B1	B2					B1	B2	B3	B4			B7	B8	B9		
		V3 -S	FAL					Vo5 AUX +12V	A2	SCL	n/a			n/a	n/a	n/a		
		A1	A2					A3	A4	A5	A6			A7	A8	A9		
		V3 CS	n/a					n/a	Alert	SDA	n/a			V1 CS	V1 -S	V1 +S		

Pin Number	Voltage	Rated Current (A)				Assignment
		min.	Typ.	max.	peak	
P9, P10	+12V	1A	50A	55A	60A	Vo1
P5, P6	+5V	1A	15A	15A	25A	Vo2
P2	+3,3V AUX	1A	10A	20A	20A	Vo3
B3	+12V AUX	0,1A	1A	2A	2A	Vo4
C6	-12V AUX	0,1A	1A	2A	2A	Vo5
P1, P3, P4, P7, P8, D7	Return of all output					COM
A9	The positive remode sense of Vo1					V1 +S
A8	The negative remode sense of Vo1					V1 -S
A7	The current share bus of Vo1					V1 CS
C9	The positive remode sense of Vo2					V2 +S
C8	The negative remode sense of Vo2					V2 -S
C7	The current share bus of Vo2					V2 CS
D2	Active Low to enable all output					EN
B2	Active Low to disable all output					INH
C2	Active Low to show power is fail					FAL
D6	Active Low to reset system					SYS RST
C1	The positive remode sense of Vo3					V3 +S
B1	The negative remode sense of Vo3					V3 -S
A1	The current share bus of Vo3					V3 CS
D9	Active Low to show I/P OK					I/P_OK
D8	Active Low to show temperature warning					DEG
B4						A2
C4	I ² C Address bit 1					A1
D4	I ² C Address bit 0					A0
A4	Alert signal of PMBus					Alert
A5	Data signal of PMBus					SDA
B5	Clock signal of PMBus					SCL
D1	Pull low inside PSU					PS_RNT



VPX Power 3U / 6U



5 Available Accessories

Hartmann Electronic produces different Power-Backplanes for Vita 62 VPX PSUs

Part Number	Description
B1931AM220	3U, 1Slot for Vin=230VAC
B1931D4221	3U, 1Slot for Vin=24VDC, designed for parallel Operation
B1932D4220	3U, 2Slot for Vin=24VDC, designed for parallel Operation
B1961D4220	6U, 1Slot for Vin=24VDC
B1961AM220	6U, 1Slot for Vin= 230VAC
VPXDC-3U-FILT1	3U, Filter Module, according to MIL-STD-461F
VPXDC-3U-HOLD	3U, Hold-Up Module, for 15ms Hold-Up-Time with 715W max.