
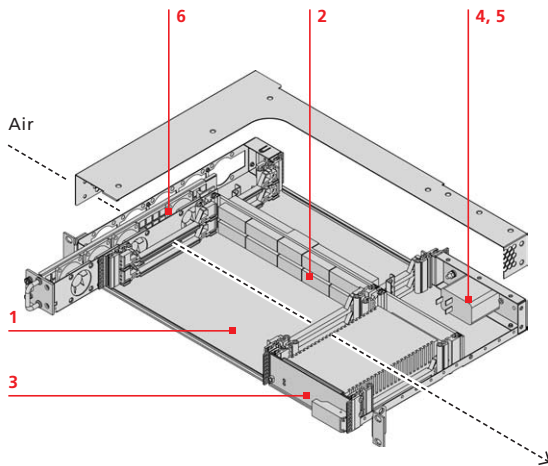


# CPCI Basic 1 U 84 HP with fan drawer Depth 280 mm

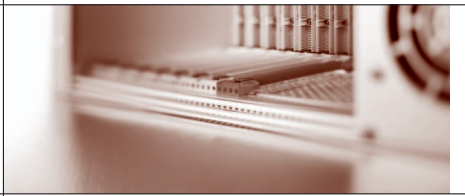

## Dimensions

B: 482.6 mm  
H: 43.4 mm  
D: 280.6 mm

## Essential features at a glance

- 1 U/84 HP Compact PCI system platform with rear I/O, for horizontal installation of 6U cards
- Card rack acc. to IEEE 1101.1, 1101.10/11 und IEC 60297-3-101, -102, -103
- CompactPCI backplane: 2 slots, 5 V
- 250 W CompactPCI power supply
- Hotswap fan drawer with filter and LED indicator
- Cooled by 4 fans (air flow from left to right)
- Completely assembled and wired

- 1 1 x CompactPCI card rack: black coating outside (RAL9005), with IEEE guide rails and ESD clip mounted on the right side
- 2 1 x CompactPCI backplane: 6+3 U, 2 slots, 64-bit/33 MHz, V(I/O) = 5 V, system slot on left side, with rear I/O and P47 connector
- 3 1 x CompactPCI power supply unit 250 W with wide range input 90–264 V<sub>AC</sub> (3.3 V/33 A, 5 V/33 A, 12 V/5.5 A, –12 V/1 A) with PFC, with P47 connector, incl. front panel 3 U/8 HP
- 4 1 x Power supply connector with switch, fuse and filter
- 5 1 x Partial front panel 3 U/8 HP with EMC spring on both sides, with cutout for power supply connector
- 6 1 x Hotswap fan drawer with 4 DC fans, 40 x 40 x 28 mm, 11.3 CFM, 37 dB(A), with LED indicator for the DC fans, replaceable filters (class G1) included

## Order number

LMH0000300

CPCI system platform 2 slots 5 V  
64-bit 1 U/84 HP with fan drawer